EZWSSM

MODELO

Llenador de botellas de muro, sin filtro ni refrigeración

Especificaciones del fabricante · Configuración del modelo



SKU / modelo	EZWSSM
Configuración	Llenador de botellas
Filtración	Sin filtro integrado
Activación	Sensor electrónico manos libres
Enfriamiento	No refrigerado
Eléctrico	115 V / 60 Hz · 1 A · 15 W
Montaje	Sobre muro · interiores
Acabado	Acero inoxidable
Dimensiones	17-15/16 × 8-3/16 × 25-7/16 pulgadas (L × A × H)
Peso de embarque	Aproximadamente 32 lb
Certificaciones	ADA según instalación · UL 399 · NSF/ANSI 61 y 372

Ver producto y comprar →

Repuestos correspondientes

No aplica kit de cartuchos: esta versión no incluye filtro integrado. Para piezas de servicio, indique SKU, número de serie y despiece original.

Cotizar refacciones de servicio →

Use agua potable segura. La instalación y el mantenimiento deben seguir el original del fabricante y la normativa local. Las condiciones de certificación se consultan en el documento original.

Documentación del fabricante

Se conserva el original del modelo o familia aplicable. Consulte sus planos y procedimientos completos antes de intervenir el equipo.

Abrir ficha original independiente

Abrir manual del modelo

Soporte: soporte@teknespure.mx · Ventas: ventas@teknespure.mx

ELKAY®
SPECIFICATIONS

Elkay ezH2O Bottle Filling Station Surface Mount Non-Filtered Non-Refrigerated Stainless
Model EZWSSM

PRODUCT SPECIFICATIONS

Elkay ezH2O® Bottle Filling Station Surface Mount, Non-Filtered Non-Refrigerated Stainless. Features shall include Antimicrobial, Green Ticker™, Hands Free, Laminar Flow, Real Drain. Electronic Bottle Filler Sensor activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120. Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

Special Features:	Antimicrobial, Green Ticker™, Hands Free, Laminar Flow, Real Drain
Finish:	Stainless Steel
Power:	115V/60Hz
Bubbler Style:	No Bubbler
Activation by:	Electronic Bottle Filler Sensor
Mounting Type:	Wall Mount (On Wall)
Chilling Capacity:	Non-refrigerated
Full Load Amps	1
Rated Watts:	15
Dimensions (L x W x H):	17-15/16" x 8-3/16" x 25-7/16"
Approx. Shipping Weight:	32 lbs.
Installation Location:	Indoor
No. of Stations Served:	1

Special Note: Able to pair with a remote chiller.

- Green Ticker: Informs user of number of 20 oz. plastic water bottles saved from waste.
- Laminar flow provides clean fill with minimal splash.
- Silver Ion Antimicrobial protection on key plastic components to inhibit the growth of mold and mildew.
- Real Drain System eliminates standing water.



Included with Product: **Bottle Filler (EZWSSM)**
Ships in one box.

AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

PRODUCT COMPLIANCE

ADA & ICC A117.1
Buy American Act
CAN/CSA C22.2 No. 120
GreenSpec®
NSF/ANSI 61 & 372 (lead free)
UL 399

Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

Installation Instructions (PDF)

Electrical components and water system are warranted for 12 months from date of installation. **Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.**

Warranty (PDF)

PART:_____QTY: _____
PROJECT:_____
CONTACT:_____
DATE:_____
NOTES:_____
APPROVAL:_____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

teknes
Distribuidor autorizado Elkay en México
Venta, instalación, refacciones y soporte técnico
WhatsApp **56 1066 3198** · ventas@teknespure.mx · Tel. 55 5524 2072 · **teknespure.mx**
Escanea para soporte, manual y refacciones
EZWSSM


Optional Accessories		
EWF3000	Elkay WaterSentry Plus Filter System Kit (Bottle Fillers) Spec Sheet (PDF)	
ECH8	Elkay Remote Chiller, Non-Filtered Refrigerated 8 GPH Spec Sheet (PDF)	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

teknes
Distribuidor autorizado Elkay en México
Venta, instalación, refacciones y soporte técnico
WhatsApp **56 1066 3198** · ventas@teknespure.mx · Tel. 55 5524 2072 · **teknespure.mx**
Escanea para soporte, manual y refacciones
EZWSSM

Elkay ezH2O Bottle Filling Station Surface Mount Non-Filtered Non-Refrigerated Stainless
Model EZWSSM


OPERATION OF QUICK CONNECT FITTINGS



Pushing tube in before pulling it out helps to release tube

IMPORTANT!
INSTALLATION NOTES :
Ensure wall is structurally sound to bear the loads imparted by the surface mount bottle filler.

ELECTRICAL
Equipped with electrical cord and three-prong molded rubber plug for use with 15-amp minimum receptacle. Rated at 115V/60Hz, single phase.

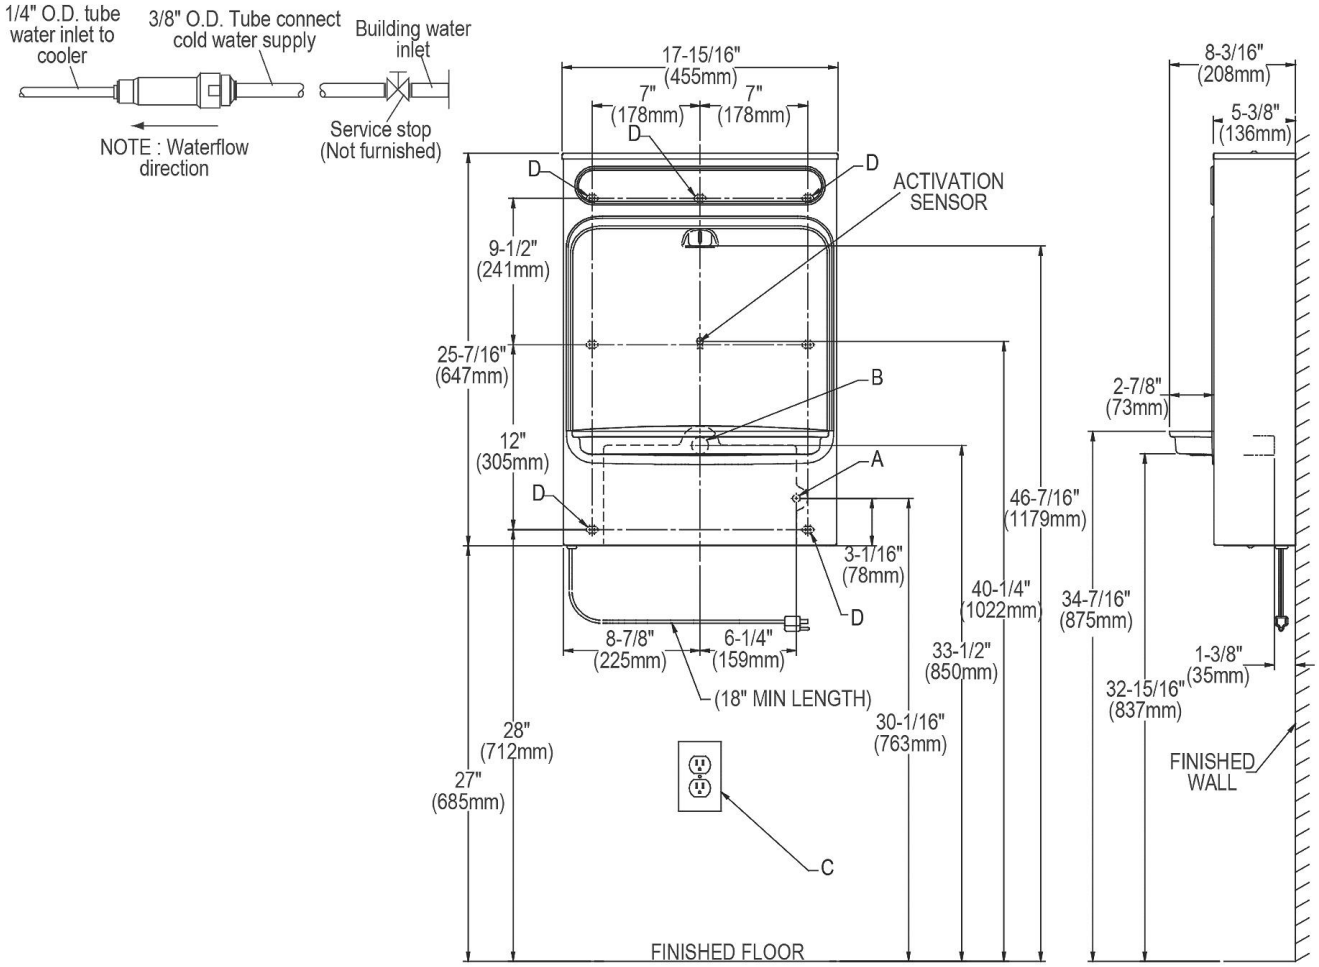

LEGEND :
A = Recommended water supply location; 1/2" I.P.S. maximum pipe size. Service stop valve not furnished.
B = Recommended location for waste outlet 1-1/4" O.D. maximum pipe size.
C = Electrical outlet, three (3) conductor grounded. Locate within safe reach of power cord.
D = 7/16" X 3/4" orbound mounting holes for fastening backplate to wall.
NOTE : New Installations Must Use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

teknes
Distribuidor autorizado Elkay en México
Venta, instalación, refacciones y soporte técnico
WhatsApp **56 1066 3198** · ventas@teknespure.mx · Tel. 55 5524 2072 · **teknespure.mx**
Escanea para soporte, manual y refacciones
EZWSSM